


PRODUCT - FIGURE	DRAWING	DESCRIPTION	NO. OF PINS	PART NUMBER
	NOT APPLICABLE	Crimp Tool	All	M22520/1-01
	NOT APPLICABLE	Positioner / Turret	All	TH29-1
	NOT APPLICABLE	Insertion tool	13-85	MP-INS-16
			150	MP-INS-18
	NOT APPLICABLE	Extraction tool	All	MP-EXT-16/18
	NOT APPLICABLE	Contact Pilot Pin	13-85	MP-GUIDE-16
			150	MP-GUIDE-18
	NOT APPLICABLE	"Combo" Pin Contact	13-85 (Size 16)	MP-108400
		Crimp Pin Contact	150 (Size 18)	MP-108300
	NOT APPLICABLE	"Combo" Socket Contact	13-85 (Size 16)	MP-108600
		Crimp Socket Contact	150 (Size 18)	MP-108500

**NOTE:** Complete instructions for providing reliable crimped wire to contact terminations and inserting proprietary contacts in MP-41 Series connectors are available in publication Pi523 located on our website [www.amphenolaudio.com](http://www.amphenolaudio.com).

## PART NUMBER BREAKDOWN MP-41 SERIES

### MULTIPIN CIRCULAR CONNECTORS

E. G. **MP-4106-85S**  
 Multipin, 4106 Cable Plug, 85 Contacts, S Female Socket Contacts,

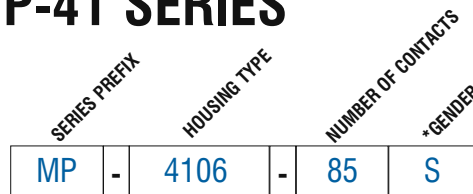

<b>SERIES PREFIX</b>	MP	=	Series Prefix
<b>HOUSING TYPE</b>	4101	=	Inline cable connecting receptacle
	4102	=	Panel receptacle
	4106	=	Cable plug
	4164	=	Panel plug
	25042S	=	Dustcap for panel plug
	25042L	=	Dustcap for cable plug
	25043S	=	Dustcap for panel receptacle
	25043L	=	Dustcap for cable receptacle
<b>NO. OF CONTACTS</b>			13, 19, 25, 37, 54, 85, 150
<b>GENDER</b> *Not required for dustcaps	P	=	Male pin contacts
	S	=	Female socket contacts

