


**ANALOGUE MULTI PAIR SNAKE CABLE**



**Part Number:** RW220224GY

**Description:** (7/0.2TC x 1Pr + Insulation + Drain Wire + Al. Foil + PVC Sheath ) x 2C + Drain Wire + Al. Foil + PVC Sheath Ø7.1mm

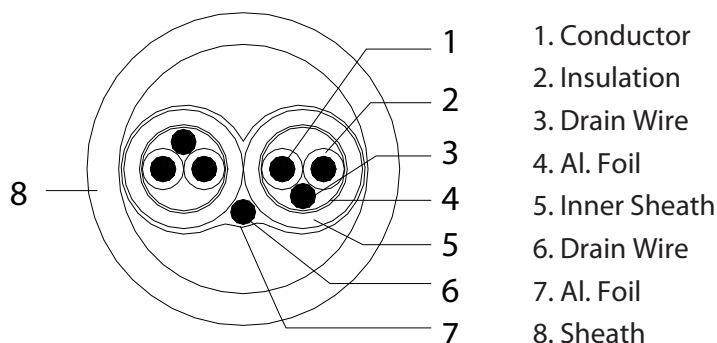

**Cable Description**

Conductor	7/0.2+/-0.006TC x 4C / Nom. O.D 0.60mm
Insulation	Material: HDPE / Color: Red, Black Min. Thickness 0.20mm / Nom. Thickness ≥0.25mm / Nom. Insulation O.D 1.1+/-0.05mm Spark Voltage: 3000V a.c
Twisting	2P: Red & Black / Nom. O.D ~2.3mm
Earth	7/0.2+/-0.006mmTC Drain Wire / Nom. O.D 0.60mm
Screen	Al. Foil Coverage 100%
Inner Sheath	Material: Soft PVC Color Code Chart: Number No. 1 - Brown, Number No. 2 - Red Min. Thickness 0.24mm / Nom. Thickness ≥0.30mm / Nom. O.D 2.9+/-0.1mm Spark Voltage: 3000V a.c
Group Twisting	2Core / Nom. O.D ~5.8
Earth	7/0.2+/-0.006mm TC Drain Wire / Nom. O.D 0.60mm
Screen	Al. Foil Coverage 100%
Outer Sheath	Material: Soft PVC / Color: Grey Min. Thickness 0.48mm / Nom. Thickness ≥0.60mm / Nom. O.D 7.1+/-0.2mm Spark Voltage: 3000V a.c

**Physical Properties**

Sheath Elongation	≥100 %
Sheath Tensile Strength	≥6 N/mm <sup>2</sup>
Flame Test	VW-1

**Electrical Properties**

Conductor Max. D.C Resistance	93.25 ohm/km 20°C
Voltage test : Core to Core	1000V a.c / 1min
Voltage test : Core to Screen	1000V a.c / 1min