

CLOCKAUDIO®

C815E-RF/
C816E/SR-RF
'RF FRIENDLY'
SLIM LINE
SHOTGUN
PROFESSIONAL
MICROPHONE





- Immune to RF artifacts
- Hypercardioid polar pattern
- Slim shotgun
- Superior grade components
- Unobtrusive design
- Engineered in high quality brass
- Finished in satin black

PROFESSIONAL
MICROPHONE
SYSTEMS

C815E-RF/
C816E/SR-RF
'RF FRIENDLY'
SLIM LINE
SHOTGUN
PROFESSIONAL
MICROPHONE

SPECIFICATIONS

TYPE	Condenser (Back Electret)			
POLAR PATTERN	Hyper Cardioid			
FREQUENCY RESPONSE	50Hz - 18KHz			
SENSITIVITY	-45dB \pm 3dB @ 1KHz (0dB = 1Vpa)			
IMPEDANCE	200 Ohms			
S/N RATIO	64dB (A)			
MAXIMUM SPL	125dB			
POWER REQUIREMENTS	9 - 48 Volts Phantom Power			
TERMINATION	Male 3 Pin XLR			
ACCESSORIES	W81 Foam windshield			
DIMENSIONS	Overall Length	Shaft Diameter	Head Diameter	Weight
C815E-RF	315mm (12.41")	7mm (0.28")	10mm (0.39")	122g (4.3oz)
C816E/SR-RF	440mm (17.34")	7mm (0.28")	10mm (0.39")	138g (4.8oz)
SHIPPING INFORMATION	Length	Width	Depth	Weight
C815E-RF	380mm (15")	40mm (1.58")	40mm (1.58")	154g (5.4oz)
C816E/SR-RF	500mm (19.7")	40mm (1.58")	40mm (1.58")	186g (6.6oz)

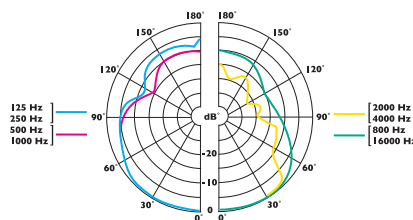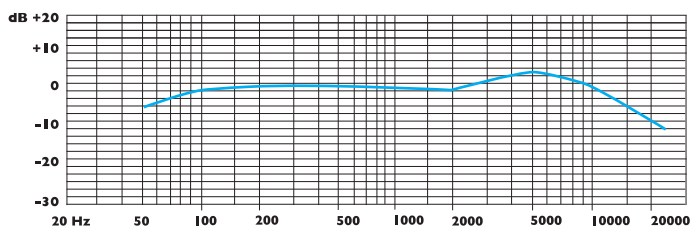

CLOCKAUDIO®

22 Arnside Road, Waterlooville, Hampshire PO7 7UP
Tel +44 (0)23 9225 1193 • Fax +44 (0)23 9225 1201
E-mail sales@clockaudio.co.uk www.clockaudio.com

Clockaudio North America

2891 du Meunier, Vaudreuil-Dorion, QC J7V 8P2, Canada
Tel: (514) 453-1838 • Fax: (514) 323-3773
E-mail: info@clockaudio.com www.clockaudio.com



PROFESSIONAL
MICROPHONE
SYSTEMS