


ANALOGUE MULTI PAIR SNAKE CABLE



Part Number: RW220424GY

Description: (7/0.2TC x 1Pr + Insulation + Drain Wire + Al. Foil + PVC Sheath) x 4C
+ Drain Wire + Al. Foil + PVC Sheath Ø8.4mm

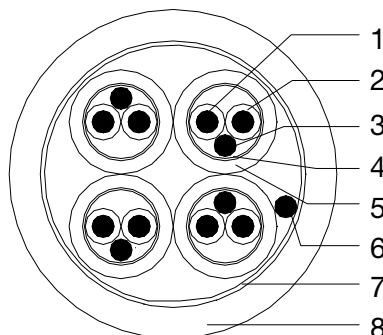

- 1. Conductor
- 2. Insulation
- 3. Drain Wire
- 4. Al. Foil
- 5. Inner Sheath
- 6. Drain Wire
- 7. Al. Foil
- 8. Sheath

Cable Description

| | |
|----------------|--|
| Conductor | 7/0.2+/-0.006TC x 8C / Nom. O.D 0.60mm |
| Insulation | Material: HDPE / Color: Red, Black Min. Thickness 0.20mm / Nom. Thickness ≥0.25mm / Nom. O.D 1.1+/-0.05mm Spark Voltage : 3000V a.c |
| Twisting | 4P: Red &Black / Nom. O.D ~2.3mm |
| Earth | 7/0.2+/-0.006mmTC Drain Wire / Nom. O.D 0.60mm |
| Screen | Al. Foil Coverage 100% |
| Inner Sheath | Material: Soft PVC Color Code Chart: Number No. 1 - Brown, Number No. 2 - Red, Number No. 3 - Orange, Number No. 4 - Yellow Min. Thickness 0.24mm / Nom. Thickness ≥0.30mm / Nom. O.D 2.9+/-0.1mm Spark Voltage : 3000V a.c |
| Group Twisting | 4Core / Nom. O.D ~7.0mm |
| Earth | 7/0.2+/-0.006mmTC Drain Wire / Nom. O.D 0.60mm |
| Screen | Al. Foil Coverage 100% |
| Outer Sheath | Material: Soft PVC / Color: Grey Min. Thickness 0.48mm / Nom. Thickness ≥0.60mm / Nom. O.D 8.4+/-0.2mm Spark Voltage: 3000V a.c |

Physical Properties

| | |
|-------------------------|----------------------|
| Sheath Elongation | ≥100 % |
| Sheath Tensile Strength | ≥6 N/mm ² |
| Flame Test | VW-1 |

Electrical Properties

| | |
|-------------------------------|-------------------|
| Conductor Max. D.C Resistance | 93.25 ohm/km 20°C |
| Voltage test : Core to Core | 1000V a.c / 1min |
| Voltage test : Core to Screen | 1000V a.c / 1min |