

CLOCKAUDIO

D43 - D44
DYNAMIC
CARDIOID
GOOSENECK
MICROPHONE

Developed for speech purposes in
a variety of pro sound applications.





- Rugged all metal construction for long life
- Response optimised for speech
- Choice of XLR or base mounting
- Engineered in high quality brass
- Finished in satin black

CLOCKAUDIO

D43 - D44 DYNAMIC CARDIOID GOOSENECK MICROPHONE

SPECIFICATIONS

TYPE	Dynamic	
POLAR PATTERN	Cardioid	
FREQUENCY RESPONSE	150 Hz - 12 KHz	
SENSITIVITY	- 80 dB +/- 3 dB at 1 KHz	
IMPEDANCE	200 Ohms	
CABLE	1 metre	
TERMINATION	M10 x 1 Thread with shakeproof washer and nut or Male 3 Pin XLR ('E' type)	
DIMENSIONS	D43/D43 E	
Head diameter	22mm	
Gooseneck diameter	8mm	
Overall length	300mm	
With XLR	350mm	
DIMENSIONS	D44/D44 E	
Head diameter	22mm	
Gooseneck diameter	8mm	
Overall length	400mm	
With XLR	450mm	
FINISH	Satin Black	
PACKING	D43	375mm x 38mm x 38mm
	D44	370mm x 155mm x 38mm
NETT/SHIPPING WEIGHT	D43	152/190 grms
	D43E	188/226 grms
	D44	172/192 grms
	D44E	208/246 grms

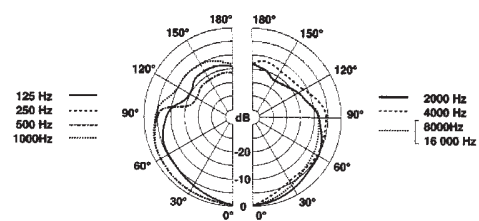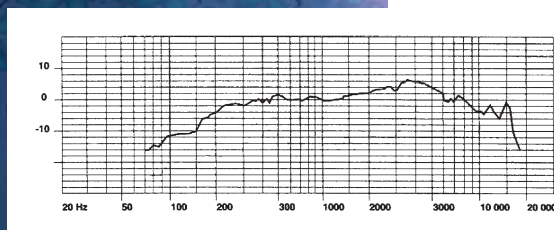

CLOCKAUDIO®

Clockaudio Ltd - Headquarters

22 Arside Road, Waterlooville, Hampshire PO7 7UR, UK
Tel +44 (0)23 9225 1193 • Fax +44 (0)23 9225 1201
e-mail sales@clockaudio.co.uk

Clockaudio North America Inc.

2891 du Meunier, Unit 103, Vaudreuil-Dorion, Quebec J7V 8P2, Canada
Tel: (450) 424-9797 • Fax: (450) 424-3660
e-mail: info@clockaudio.com

www.clockaudio.com

PROFESSIONAL
MICROPHONE
SYSTEMS

As part of a continuous product improvement programme, we reserve the right to alter specifications without prior notice.