


AUTOMOTIVE CONNECTING CABLE

Part Number: TSCW24

Description: 24/0.20mmBC x 2C (PVC O.D 2.2mm) + PVC Sheath Φ 3.3x5.4mm

Applications: For Low Voltage High Amperage wiring

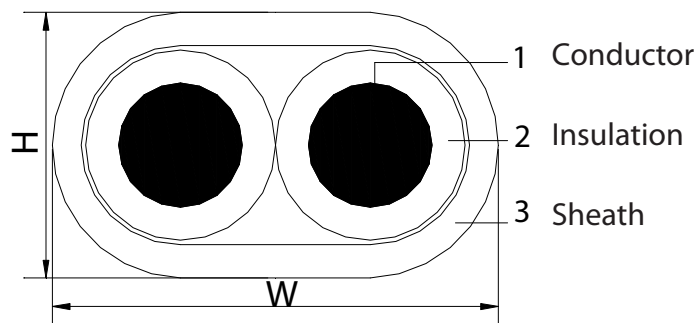

Cable Description

Conductor	24/0.20±0.003BCx2C (0.75mm ²)
Insulation	PVC / Color : Red, White Min. Thickness 0.48mm / Nom. Thickness 0.52mm Nom. O.D 2.2+0.01/-0mm Spark Voltage: 3000V a.c
Sheath	PVC/Color: Blue or Red Min. Thickness 0.38mm / Nom. Thickness 0.45mm Nom. O.D 3.3x5.4+0.2/-0mm

Physical Properties

Sheath	Elongation : 100 % Tensile Strength: 8 N/mm ²
Flame Test	VW-1

Marking: GARLAND 2 X 24/0.2MM DOUBLE INSULATED 240V TSCW24 N513 (With "M")

Available Sizes: 100m, 500m

Remarks: BC=Bare Copper