


ANALOGUE MULTI PAIR SNAKE CABLE



Part Number: RW221624GY

Description: (7/0.2TC x 1Pr + Insulation + Drain Wire + Al. Foil + PVC Sheath) x 16C + Drain Wire + Al. Foil + PVC Sheath Ø15.2mm

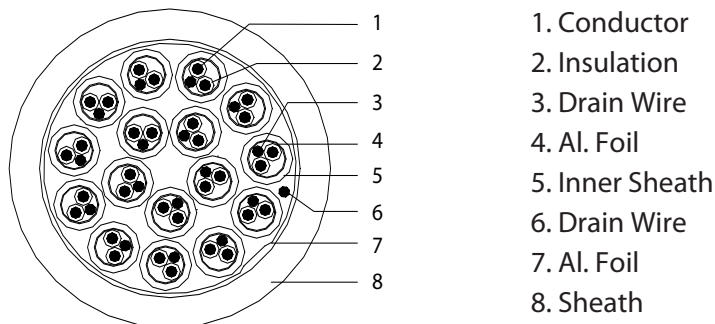

Cable Description

Conductor	7/0.2+/-0.006TC x 32C / Nom. O.D 0.60mm
Insulation	Material: HDPE / Color: Red, Black Min. Thickness 0.20mm / Nom. Thickness ≥0.25mm / Nom. O.D 1.1+/-0.05mm Spark Voltage: 3000V a.c
Twisting	16P: Red &Black / Nom. O.D ~2.3mm
Earth	7/0.2+/-0.006mmTC Drain Wire / Nom. O.D 0.60mm
Screen	Al. Foil Coverage 100%
Inner Sheath	Material: Soft PVC Color Code Chart: Number No. 1 - Brown, Number No. 2 - Red, Number No. 3 - Orange, Number No. 4 - Yellow, Number No. 5 - Green, Number No. 6 - Blue, Number No. 7 - Violet, Number No. 8 - Grey, Number No. 9 - White, Number No. 10 - Black, Number No. 11 - Tan, Number No. 12 - Pink, Number No. 13 - LT Grey/Brown, Number No. 14 - LT Grey/Red, Number No. 15 - LT Grey/Orange, Number No. 16 - LT Grey/Yellow Min. Thickness 0.24mm / Nom. Thickness ≥0.30mm / Nom. O.D 2.9+/-0.1mm Spark Voltage: 3000V a.c
Group Twisting	16Core / Nom. O.D ~13.6mm
Earth	7/0.2+/-0.006mmTC Drain Wire / Nom. O.D 0.60mm
Screen	Al. Foil Coverage 100%
Outer Sheath	Material: Soft PVC / Color: Grey Min. Thickness 0.64mm / Nom. Thickness ≥0.8mm / Nom. O.D 15.2+/-0.2mm Spark Voltage: 3000V a.c

Physical Properties

Sheath Elongation	≥100 %
Sheath Tensile Strength	≥6 N/mm ²
Flame Test	VW-1

Electrical Properties

Conductor Max. D.C Resistance	93.25 ohm/km 20°C
Voltage test : Core to Core	1000V a.c / 1min
Voltage test : Core to Screen	1000V a.c / 1min